



# Argo 8x8

EU EDITION 700 HD

## Utility Transport

Road Approved for European Union ONLY

e1\*2003/37\*0326\*02



# SPECIFICATIONS FOR 8X8 700 HD

<b>ENGINE</b>	4 cycle OHV V-Twin gasoline engine, electronic ignition, full pressure lubrication and oil filter 3 year limited Kohler engine warranty	
<b>MODEL</b>	Kohler Aegis LH 690	
<b>HORSEPOWER</b>	26	
<b>DISPLACEMENT</b>	674cc	
<b>COOLING</b>	Liquid Cooled	
<b>STARTING</b>	Electric	
<b>BRAKES</b>	Hydraulic	
<b>STEERING</b>	One-piece ergonomic handlebar steering control with mounted brake lever. For safety and ease of handling, the ARGO steering transmission provides continuous torque to all axles.	
<b>CONTROLS</b>	Right-hand twist grip throttle control assembly including light, signal and horn switches, dash mounted choke control and ignition switch.	
<b>CLUTCH</b>	Belt-driven, Continuously Variable Transmission (CVT) maximizes engine power to the transmission.	
<b>TRANSMISSION</b>	ADMIRAL triple differential steering transmission with dedicated Hi and Low selector; Forward, Neutral, Reverse.	
<b>DRIVE SYSTEM</b>	Roller chains drive machined sprockets that are spline-fit onto 1 1/4" diameter axles. Bearings are greaseable.	
<b>FRAME</b>	Formed steel channel construction, welded for high strength and durability. Polyester powder-coated for lasting protection.	
<b>BODY</b>	Vacuum formed High Molecular Weight Polyethylene	
<b>FULL SKID PLATE</b>	Standard	
<b>LOAD CAPACITY<sup>1</sup></b>	<b>ON LAND</b>	454 kg (1000 lbs) total
	<b>ON WATER</b>	386 kg (850 lbs) total
<b>TOWING CAPACITY<sup>2</sup></b>	818 kg (1800 lbs)	
<b>SEATING CAPACITY</b>	2 persons (Driver plus 1 passenger)	
<b>FUEL CAPACITY</b>	27 litres See-through polyethylene fuel tank. 8 hours of operation <sup>3</sup>	
<b>SPEED<sup>4</sup></b>	<b>ON LAND</b>	32 km/h / 20 mph
	<b>ON WATER<sup>5</sup></b>	4 km/h (5.5 km/h with ARGO AT189 tires)
<b>SHIPPING WEIGHT</b>	641 kg (1410 lbs)	
<b>AXLE BEARING EXTENSIONS</b>	Front - Standard Rear - Standard	
<b>LCD DIGITAL GAUGE CLUSTER</b>	Speedometer, Odometer, Voltmeter, Hourmeter, Tachometer, Engine Coolant Temperature, Low Oil Pressure, Parking Brake Reminder Light	
<b>TIRES</b>	ARGO 25x12.00-9 NHS	
<b>GROUND PRESSURE</b>	14.5 kPa using tires 4.6 kPa using tracks	
<b>GROUND CLEARANCE</b>	<b>TIRES</b>	240 mm (9.5")
	<b>TRACKS</b>	265 mm (10.5")
<b>OPERATING CONDITIONS</b>	All weather, all terrain, -40°C to +40°C	





- Capacity includes occupants, cargo, outboard motor and fuel, and installed accessories.  
Max. outboard motor size 7.4 kW (9.9 hp).
- Towing capacity is approximate and depends on type of surface, load on vehicle as well as incline.  
Max Hitch Tongue Load (when equipped with hitch) 100 lbs / 45kg for all models
- Fuel consumption depends on load and operating conditions.
- All speeds are approximate and depend on conditions.
- Always wear approved Personal Floatation Device (PFD) when operating in water or on ice.

Appearance and specifications subject to change without notice.

Vehicle classification: T1 as per EU - registration # e1\*2003/37\*0326\*02

## AVAILABLE ARGO COLORS

\*Colors are reproduced with great care, but may vary slightly on actual vehicles.

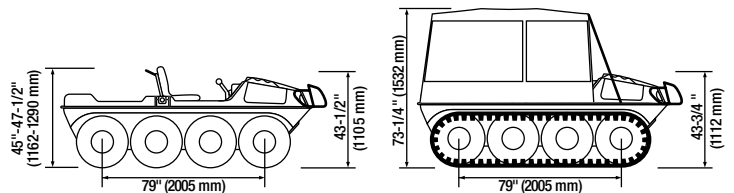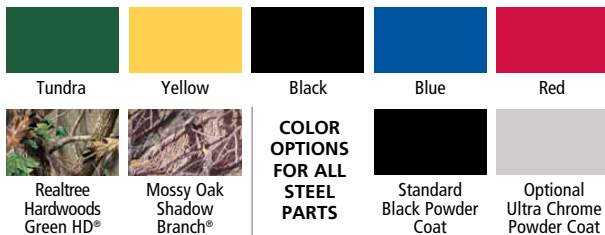

**ADJUSTABLE BUCKET SEATS:**  
 Weight adjustment: 50 - 120 kg  
 Fore & aft adjustment: 160 mm  
 Height adjustment: 60 mm  
 Suspension travel: 70 mm

**SUPER TRACK:** Adds 1 in. (25mm) to vehicle height  
**RUBBER TRACK:** Adds 1-1/4 in. (32mm) to vehicle height  
**CONV. TOP:** 1-1/2 in. (38mm) less than ROPS height.



220 Bergey Court, New Hamburg,  
 ON, Canada N3A 2J5  
 Tel: (519) 662-4000 • Fax: (519) 662-2421  
 www.ARGOutv.com

Proud to be located in



**treadlightly!** **Safety!**  
 LEAVING A GOOD IMPRESSION ...always in Season!